Mega Pixel EX(HD)-SDI BOX Camera

ACH-HDT6000ID (DC12V/AC24V)

DarkHunter

FEATURES

- 1/2.8" 2.2 Mega SONY STAVIS CMOS Sensor
- 1,200TV Lines (Resolution)
- 2.8~12mm TDN Mega DC Lens(2Motorized)
- True Day & Night
- WDR (Wide Dynamic Range)
- DNR (Digital Noise Reduction : 2D + 3D)
- Privacy Mask Function
- Intelligent Motion Detection
- Defog : Defogging foggy video image
- Output:
  EX-SDI,HD-SDI
  -Analog Output : NT, PAL Composite
- Built-in OSD Controller
- Built-in Service Video

Mega Pixel EX-SDI (LONG REACH) True Day & Night Box Camera

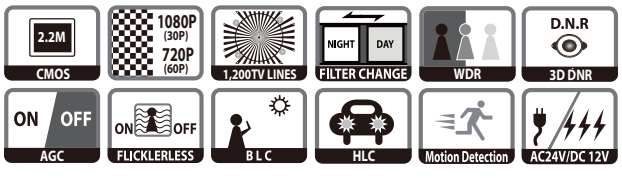

DIMENSIONS

unit : mm

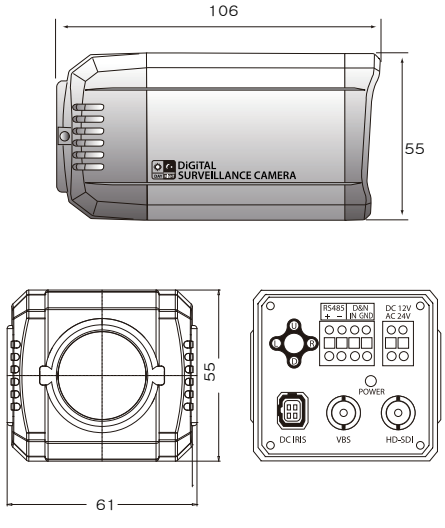

SPECIFICATIONS

	ACH-HDT6000ID
Image Sensor	1/2.8" 2.2Mega pixel SONY STARVIS CMOS
Resolution	Digital : 1920 X 1080p, 1280 x 720p
	Analog : 700TVL
Total Pixels	1945(H) X 1109(V) = 2,16Mega(pixel)
Effective Pixels	1945(H) X 1097(V) = 2,13Mega(pixel)
Shutter Speed	Auto / Manual (1/30(1/25) ~ 1/60000) / FLICKER
Min. illumination	Color : 1.0 lux , BW : 0.5lux
	Color DSS : 0.002 lux , BW DSS : 0.001 lux
S/N Ratio	More Than 50dB (AGC off)
Fix Lens	Normal / Deblur
DC IRIS	Indoor / Outdoor / Deblur
SENSE UP	x2 / x4 / x8 / x16 / x32
DAY & NIGHT	Auto / Color / B&W / Ext
SMART IR	Off / On
WHITE BALANCE	Auto / Auto Ext / Preset / Manual
MIRROR	Off / H / V / H&V
E.ZOOM	x1 ~ x8
DNR	Off / Low / Middle / High
PRIVACY	Off / On (16 points)
MOTION	Off / On (16 points)
SHADING	0 ~ 100%
DEFOG	Off / On
WDR / BLC / HLC	Off / WDR(Low / Middle / High) / BLC /HLC
COMMUNICATION	ID(1 ~ 255)
	BAUDRATE (2400/ 4800/ 9600/ 19200/ 38400/
	57600/ 115200)
SYSTEM	NTSC / PAL
HD FORMAT	1080P / 720p
Lens	C / CS Mount
Cable	Over 400m (EX-SDI On), 200m(EX-SDI Off) with 5C-HFBT
Power Source	DC12V±10%, AC24V±10%
Power Consumption	DC12V 240mA / AC 24V 100mA
Operating Temperature	-10℃ ~50℃ (Humidity : 0%RH ~ 90%RH)
Storage Temperature	-20℃~60℃ (Humidity : 0%RH ~ 90%RH)
Dimension(mm)	61(W) x 55(H) x 106(L)
Weight	Approx. 0.4kg

*Specification and Design are subject to change without notice due to product improvement.